

# PWC2

Up & Down LED Wall Cylinder



## SPECIFICATIONS

### HOUSING

- Die cast aluminum housing
- Powdercoat bronze finish
- Corrosion resistant housing and hardware
- Silicone rubber gasket

### ELECTRICAL

- Quad Tap (QT) - 120/208/240/277V

### OPTICAL SYSTEMS

- Tempered Clear Glass Lens
- IC current controlled LED circuits
- CRI > 80
- Available in 30K, 35K, 40K, 50K
- 1500 Lumens (750lm Up / 750 Im Down)

### MOUNTING

- Threaded pipe (NPS 1/2") which attaches to a junction box is standard
- Wall mounted up to heights of 12'


### CODE COMPLIANCE

- cETLus Listed for Wet Locations

### WARRANTY

- 5 Year

### ORDERING INFORMATION

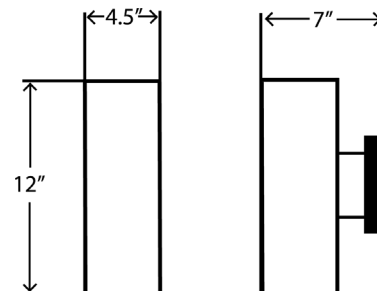

#### LUMINAIRE

MODEL	WATTS	CCT	FINISH
PWC2 Up & Down LED Wall Cylinder	18w	30K - 3000K	BRZ - Bronze
		35K - 3500K	
		40K - 4000K	
		50K - 5000K	